



DISTRICT NIRMITHI KENDRA, CIVIL STATION, MALAPPURAM.

Ph: 0483- 2735594

INVITATION OF TENDER (LABOUR)

Tender No : DNKM/TNDR/LBR 01/035 /23-24.		30/01/2024	
PROJECT NAME	BEAUTIFICATION WITH ENVIRONMENT FRIENDLY MATERIAL FOR OFFICE OF DISTRICT EDUCATION, THIRURANGADI		
LOCATION	Parappanagadi	Taluk :	Tirurangadi
SCOPE OF WORK	Curtain, Indoor plants, outdoor plants, etc		

Tenders are invited from reputed firms/Labour suppliers for the specified works (schedule attached) as item rate contract. The bidder should have GST registration.

Tender form and Tender schedule may be downloaded from District administrative website - **www.malappuram.nic.in** , and **www.nirmithikendramlp.com**, and **www.nirmithikendramlp.com** . Tenders should have addressed to , **Project Manager cum Exe.secretary, District Nirmithi Kendra, Civil Station, Malappuram, 676505, phone : 0483-2735594.** Tenders are accepted through registered post/Courier/by hand. Late tenders will not be accepted. Tenders will be opened in the presence of Tenderer or their authorized representatives who may be present on that time. If the Tender opening date happens to be a declared holiday, the process will be done on the next working day at same time and place. Further details can be had from the office of District Nirmithi Kendra, Civil Station, Malappuram during working hours.

1	Last Date & Time of Submission of Bids	:	07.02.2024, 3.00 pm
2	Date & Time of Opening of Bids	:	08.02.2024, 11.00 am
3	Bid validity	:	60 days

Name :


Address of firm :

Signature :

Project manager cum Exe.secretary
District Nirmithi Kendra, Malappuram.

Signature :

[Handwritten Signature]
30/01/24
**Project Manager Cum
Executive Secretary
District Nirmithi Kendra
Civil Station, Malappuram**

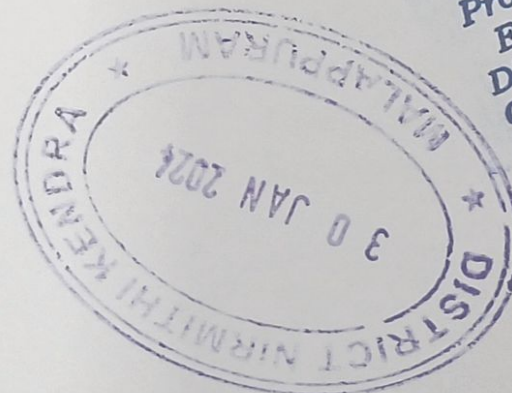

INSTRUCTIONS TO BIDDERS


Tender No : DNKM/TNDR/LBR 01/035 /23-24.		30/01/2024
Project Name	BEAUTIFICATION WITH ENVIRONMENT FRIENDLY MATERIAL FOR OFFICE OF DISTRICT EDUCATION, THIRURANGADI.	


- 1 The cover containing the tender should be superscribed as " Tender for labour work of ".....".
- 2 The rates should be quoted in the specified schedule itself.
- 3 The work should be completed within 180 days from the date of receipt of work order.
- 4 All materials will be provided seperatly as per site requirement in time. Nails, Scaffolding ,Shuttering materials, vibrators, mixer machines, lifts and all other machineries etc.. , if needed should be provided by the labour/mason.
- 5 **Work should be carried out with at most care and quality as directed by the site in charge and should be completed with in the proposed completion period.**
- 6 Penalty @ 1 % per week will be imposed for any delay in completing works, after 120 days of work order subject to a maximum of 10%.
- 7 Part payments against the progress of work will be released by Nirmithi kendra depending on assessment of the progress of work.
- 8 All statutory payments towards the welfare of labours engaged will be the sole responsibility of the Labour contractor
- 9 **The undersigned reserves the right to reject any or all tenders without assigning any reasons.**Tenders not satisfying the above Terms and conditions are liable to be rejected without any further communication.
- 10 **No employee of DNKM, personally or through family members, will in connection with the tender/Quotation for, or the execution of a contract, demand, take a promise for or accept, for self or third person, any material or immaterial benefit which the person is not legally entitled to.**
- 11 In the event of maximum appendixes being quoted lowest by a single bidder,DNKM at its Discretion may request L1 Bidder to match the amount for remain appendixes at a cost quoted lowest by other bidders.

Name :

Address of firm :

Signature :



Project Manager Cum
Executive Secretary
District Nirmithi Kendra
Civil Service Malappuram.
Signature :

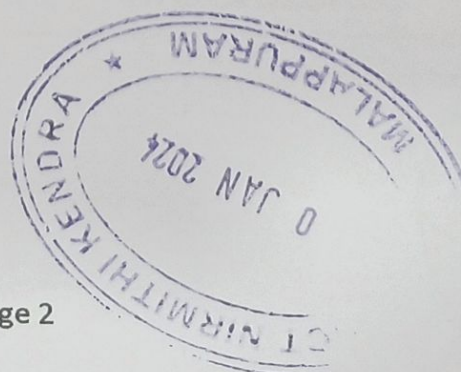

TENDER SCHEDULE - LABOUR					
(FORMAT FOR QUOTING UNIT PRICE OF LABOUR)					
DATE : 30/01/2024					
Tender No : DNKM/TNDR/LBR 01/035 /23-24.					
Project Name	BEAUTIFICATION WITH ENVIRONMENT FRIENDLY MATERIAL FOR OFFICE OF DISTRICT EDUCATION, THIRURANGADI				
Sl no	Details of labour work	Quantity	unit	Rate per unit (without GST)	Total

APPENDIX - A : (Industrial work , grill painting etc) - Vertical garden					
1	10.16.1 - Labour charge for Steel work in built up tubular (round, square or rectangular hollow tubes etc.) trusses etc., including cutting, hoisting, fixing position and applying a priming coat of approved steel primer, including welding and bolted with special shaped washers etc. complete. Hot finished welded type tubes	214.441	kg	43.75	9381.79
2	13.61.1- Labour charge for Painting with synthetic enamel paint of approved brand and manufacture to give an even shade. Two or more coats on new work	38.905	m2	103.35	4020.83
TOTAL					13402.63
TENDER BELOW @					

APPENDIX - B : (curtain work) Labour+ material					
1	Supplying and fixing Cloth type window curtain with necessary fittings - window curtain, including labour and material.	47.520	m2	1185.21	56321.18
TOTAL					56321.18
TENDER BELOW @					

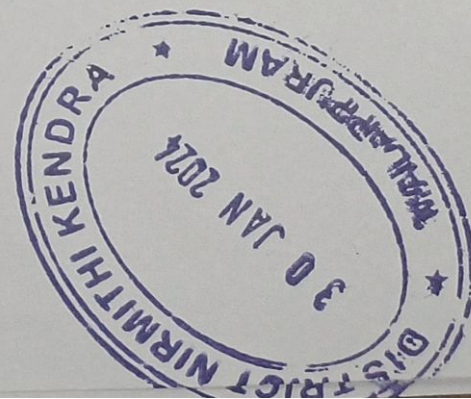

APPENDIX - C : (Plantation work , etc)

1	30.2.30.1 - Providing and fixing Square Cement Concrete pots of specified size, cast with cement concrete of nominal mix 1:2:4 (1 cement: 2 coarse sand: 4 graded stone aggregate 6 mm nominal size), reinforced with 7 Nos (3 nos horizontal & 4 nos vertical "U" shape) M.S. wires of 3.5 mm dia as per design, including required frame work, finishing with cement punning on exposed surface, curing for specified period and stacking in required rows & height, all complete as per direction of Officer in-charge Top inner width 35 cm, outer bottom width 25 cm, total height 35 cm and wall thickness 25.4 mm including labour and material.	50.000	no	327.05	no	16352.50
2	30.2.31.3 - Filling of the following size empty pots with mixture of good earth & manure in the ratio of 2:1 (Two part of Good earth & one part of manure) and placing them on appropriate place i/c carriage of earth, manure and pots up to 50 mtr, as per direction of officer incharge. (The cost of good earth, earthen pots & manure will be paid seperately.) Size of Empty Pots 20cm Top dia, 12cm Bottom Dia & 20cm Perpendicular height	50.000	no	13.43	no	671.50
TOTAL						17024.00
TENDER BELOW @						

Address of firm :

Signature :

Project manager cum Exe.secretary

District Nirmithi Kendra, Malappuram.

Signature :

